

CLIPPO S AB

SPECIFICATIONS

MOUNTING		
POWER	[W]	9,3 / 9,5
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	45-915 / 1100
COLOUR TEMPERATURE	[K]	1800-3000 / 2700
CRI		>90
BEAM ANGLE		34
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	96 / 115
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		NOT INCLUDED
DIMMING		
THROUGH-WIRING		YES

MATERIAL	ALUMINUM
INGRESS PROTECTION	IP20
PROTECTION CLASS	I
NET WEIGHT	[kg] 0,33
GROSS WEIGHT	[kg] 0,35
COLOUR (HOUSING)	WHITE ~RAL9003
COLOUR (HOUSING)	BLACK ~RAL9005

*Luminous flux values are nominal LED


OPTIONS / OPTIONAL ACCESSORIES

Honey comb louver
Reflector 9,5LED 24°/46°
Reflector 9,3LED 24°/48°




LIGHT DISTRIBUTION

34°

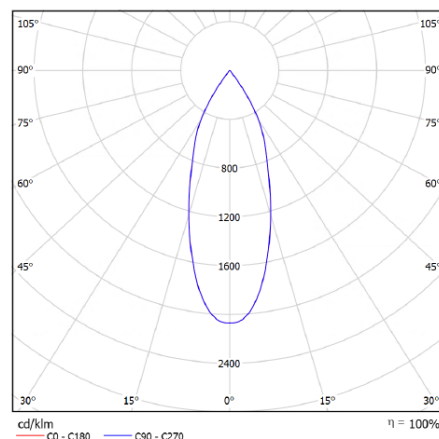

Colours:



white/white



white/gold




black/black




black/gold

CUT OUT DIMENSIONS mm

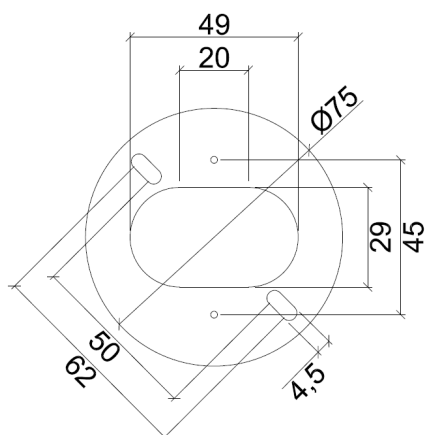

FIXTURE DIMENSIONS mm

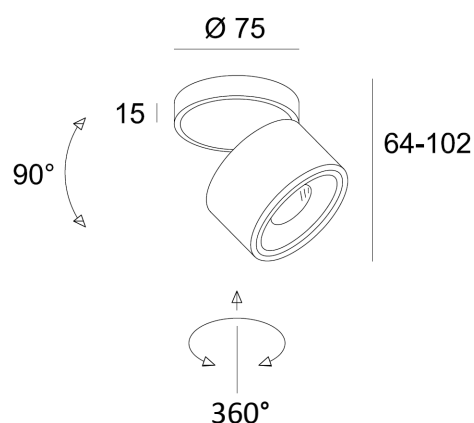

dim to warm

CRI > 90

DIM

IP20



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING