

CLIPPO S DIM TO WARM


SPECIFICATIONS

MOUNTING		CEILING / WALL
POWER	[W]	9,5
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	45-915
LIGHT COLOUR	[K]	1910-3000
CRI		>90
BEAM ANGLE	[°]	34 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	96
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,48
GROSS WEIGHT	[kg]	0,50
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005



LIGHT DISTRIBUTION

34°

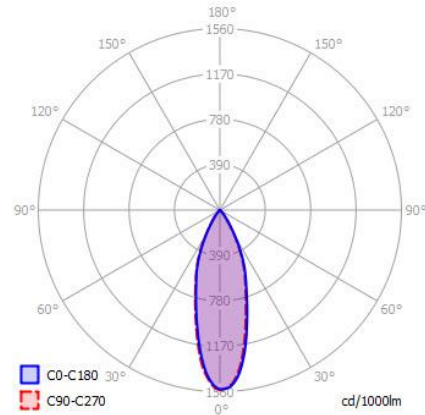

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	24 / 48
HONEY COMB LOUVER		BLACK
ANTI GLARE RING		GOLD
MOUNTING PLATE		FOR Ø 68 JUNCTION BOXES
DIMMING		DALI (DRIVER EXTERNAL)



Colours




white/white

white/gold


black/black

black/gold

MOUNTING DIMENSIONS



FIXTURE DIMENSIONS

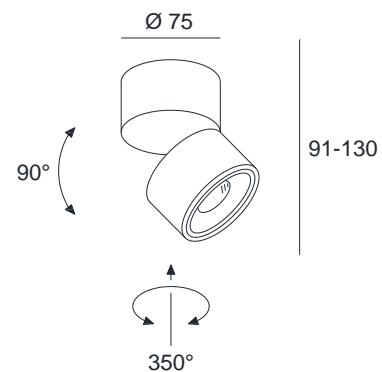

DLS LIGHTING

www.dlslighting.com

***DLS**
LIGHTING

CLIPPO S 2700K


SPECIFICATIONS

MOUNTING		CEILING / WALL
POWER	[W]	9,3
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1100
LIGHT COLOUR	[K]	2700
CRI		>90
BEAM ANGLE	[°]	34 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	118
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,48
GROSS WEIGHT	[kg]	0,50
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005



LIGHT DISTRIBUTION

34°

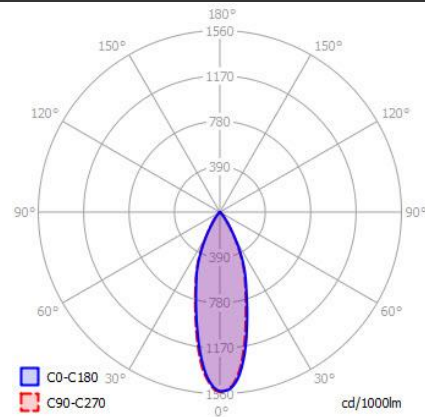

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	24 / 48
HONEY COMB LOUVER		BLACK
ANTI GLARE RING		GOLD
MOUNTING PLATE		FOR Ø 68 JUNCTION BOXES
DIMMING		DALI (DRIVER EXTERNAL)



Colours




white/white

white/gold


black/black

black/gold

MOUNTING DIMENSIONS



FIXTURE DIMENSIONS

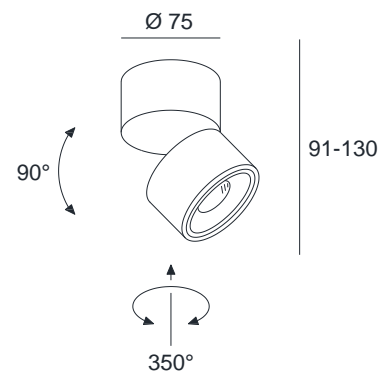

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING