

HANGING BALI

SPECIFICATIONS


| | | |
|--------------------|---------|----------------------|
| MOUNTING | | CEILING |
| POWER | [W] | 1xGU10 LED |
| LAMP | | NOT INCLUDED |
| LUMINOUS FLUX* | [lm] | - |
| LIGHT COLOUR | [K] | - |
| CRI | | - |
| BEAM ANGLE | [°] | - |
| AVERAGE LIFETIME | [h] | - |
| LUMINOUS EFFICACY | [lm/W] | - |
| POWER SUPPLY | [V] [A] | 220-240V AC 50/60 Hz |
| LED-DRIVER | | - |
| DIMMING | | SEE LAMP |
| THROUGH-WIRING | | NO |
| MATERIAL | | ALUMINUM |
| INGRESS PROTECTION | | IP20 |
| PROTECTION CLASS | | I |
| NET WEIGHT | [kg] | 1,07 |
| GROSS WEIGHT | [kg] | 1,10 |
| COLOUR (HOUSING) | | WHITE ~RAL9010 |
| COLOUR (HOUSING) | | BLACK ~RAL9004 |

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION (OSRAM LAMP)

36°

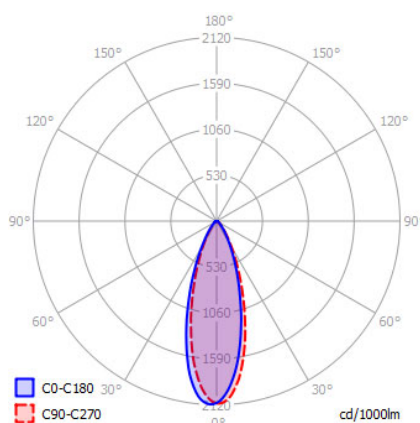

OPTIONS / OPTIONAL ACCESSORIES

| | |
|---|--------------|
| ANTI GLARE RING | GOLD |
| CEILING HOUSING FOR MULTIPLE PEDANTS LP5/ LP7/ LP8/STAR | |
| CABLE KIT 5 | 5000mm cable |

Colours




white/black

white/gold


black/black

black/gold

MOUNTING DIMENSIONS



FIXTURE DIMENSIONS

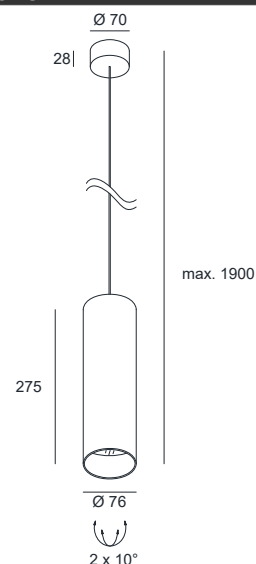

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING